



Automatic Variable Speed Booster Unit

Type JET-E (P2) CDX

APPLICATIONS

- Domestic water supply for villas, houses, schools, hotels, pent-houses, rest houses and buildings.
- Industrial water boosting.

FEATURES


- **Constant pressure**
 - PID Controller with inverter able to adjust water pressure perfectly by variable speed control.
- **Energy saving**
 - Using of the inverter able to save energy.
- **No water hammering**
 - Preventing water hammer as speed is adjusted automatically to meet variable demand.
- **Fully tested & assembled unit**
 - Ensure trouble-free operation.
- **Stainless steel pump set used**
 - Hygienic and clean water assured.
- **EBARA TOTAL warranty on all components used**
 - More value for money.
- **Nationwide dealers representation**
 - After-sales service assurance.

SPECIFICATIONS


- Supply Voltage : 1 x 230 Vac \pm 10% (50Hz)
- Max liquid temperature : 90°C
- Installation : Indoor / Outdoor



PERFORMANCE CHART

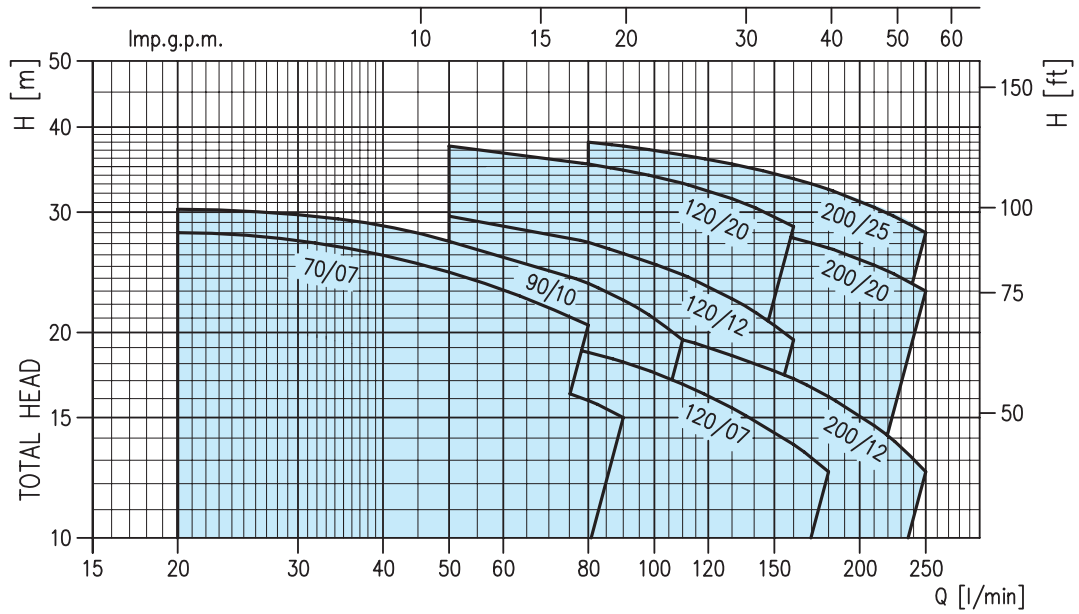

DIMENSION

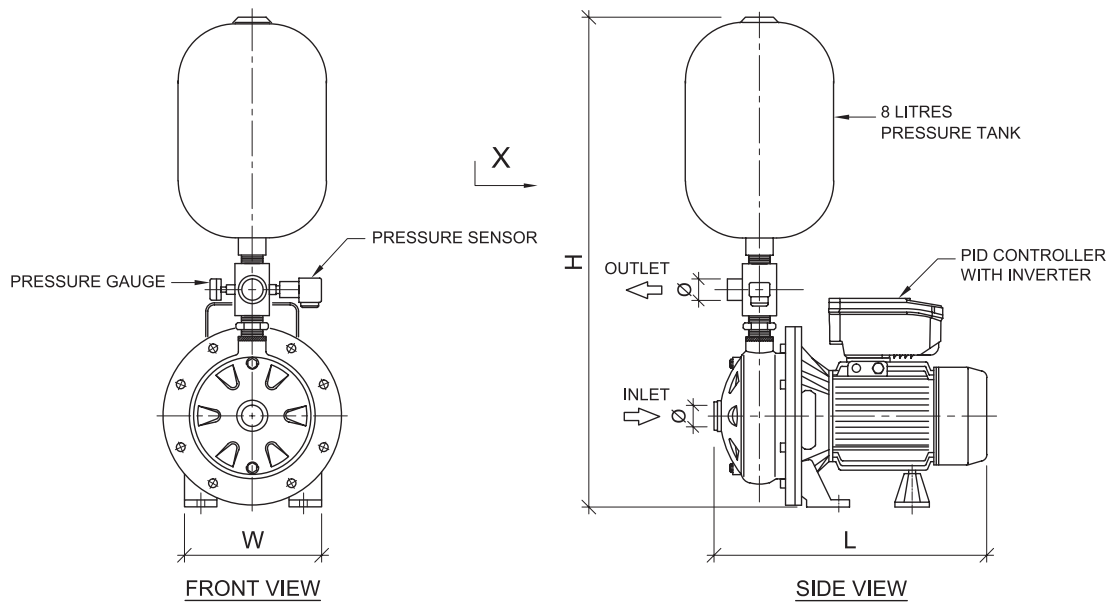

MODEL	Power (kw)	Dimension (mm)			Connection		Weight (kg)
		L	W	H	Suction (Ø)	Discharge (Ø)	
CDX 70/07	0.55	320	160	605	1"1/4	1"	15.1
CDX 90/10	0.75	320	160	605	1"1/4	1"	15.0
CDX 120/12	0.9	332	160	605	1"1/4	1"	16.4

* Dimensional details are provided for reference only.
 * All specifications are subject to change without prior notice.



EBARA Pumps Malaysia Sdn Bhd
 6, Jalan TP3, UEP Subang Jaya Industrial Park,
 47620 Subang Jaya, Selangor, Malaysia.
 Tel : 03-8023 6622 Fax : 03-8023 9355
 Email : sales.epm@ebaracom
 Website : www.ebaracom.my



Authorised dealer: