



Stainless Steel Pumps For Dirty Water

Type RIGHT

APPLICATIONS

- Pump casing, impeller, cover,
- General submersible pumping
- Draining filtered water
- Handling drain water
- Emptying pits and discharge into sewers
- For automatic dirty water pump stations
- Supplied with 10m cable length type H07RNF
- Available with or without float switch

SPECIFICATIONS

- Maximum liquid temperature : 50°C
- Maximum immersion : 7m
- Maximum passage of solids : 35mm

MATERIALS


- Pump casing, impeller, cover, casing cover and motor casing in AISI 304
- Shaft in AISI 303
- Double mechanical seal with interposed oil chamber : upper in carbon/ceramic/NBR, lower in SiC/SiC/NBR

TECHNICAL DATA

- Asynchronous 2 poles motor
- Insulation : Class F
- Protection degree : IP68
- 1~230V $\pm$ 10%, 50Hz - 3~400V $\pm$ 10%, 50Hz
- Permanent split capacitor and automatic thermal overload protection for single-phase version
- Thermal protection to be provided by the user for three-phase version
- DNA 1" ½




PERFORMANCE CURVE

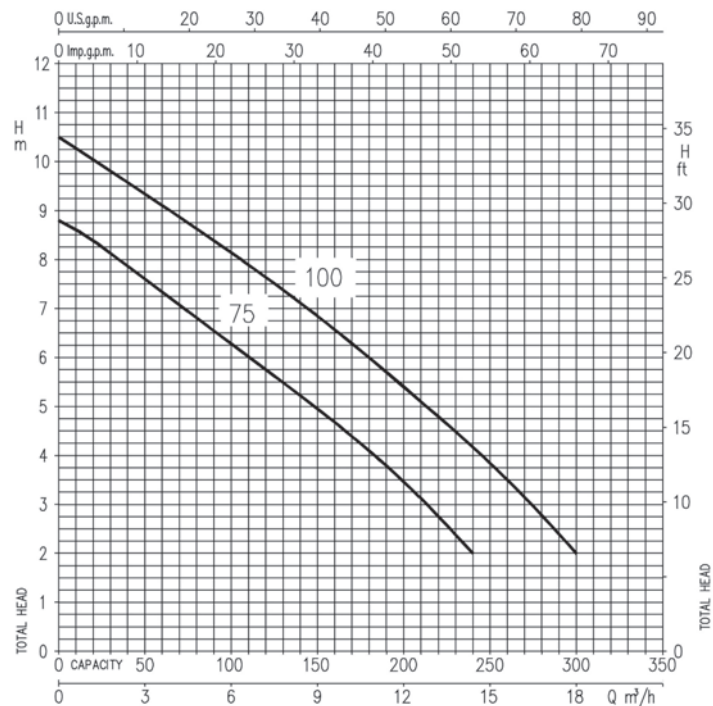


Pump type		kW	Capacitor		Absorbed Current (A)		l/min m³/h	Q=Capacity							
Single-phase 230V 50Hz	Three-phase 400V 50Hz		µF	Vc	1~	3~		40	80	100	120	160	200	240	300
RIGHT 75 M	RIGHT 75	0.55	20	450	4.8	2.1	2.4	2.4	4.8	6	7.2	9.6	12	14.4	18
RIGHT 100 M	RIGHT 100	0.75	31.5	450	5.7	2.6	7.8	6.8	6.2	5.7	4.7	3.4	2	-	-
							9.5	8.6	8.1	7.6	6.6	5.4	4.2	2	2

DIMENSION

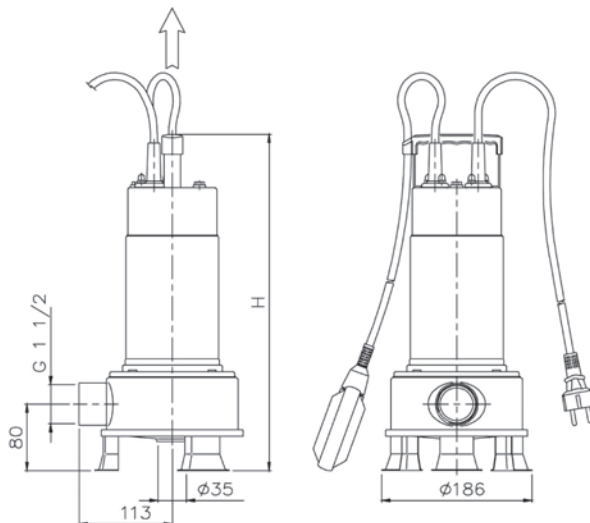

Pump	(mm)		Weight kg
	H	H2	
RIGHT 75	405	480	10
RIGHT 100	430	500	11.5

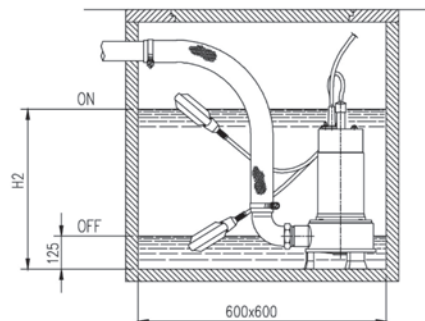

* Dimensional details are provided for reference only.
* All specifications are subject to change without prior notice.



EBARA Pumps Malaysia Sdn Bhd
6, Jalan TP3, UEP Subang Jaya Industrial Park,
47620 Subang Jaya, Selangor, Malaysia.
Tel : 03-8023 6622 Fax : 03-8023 9355
Email : sales@ebara.com.my
Website : www.ebara.com.my



Authorised dealer: