

SB3

3" submersible centrifugal pump

Casing, discharge casing and motor joint are in AISI 304. Polyacetal resin POM diffuser. Impeller in PPO, glass fibre reinforced polymer.


Especially recommended for the movement of clear water in wells, the pressurisation of clean water for agricultural use, industrial use and for the irrigation and pumping of water in general.



Suitable for
horizontal
operation



Silent

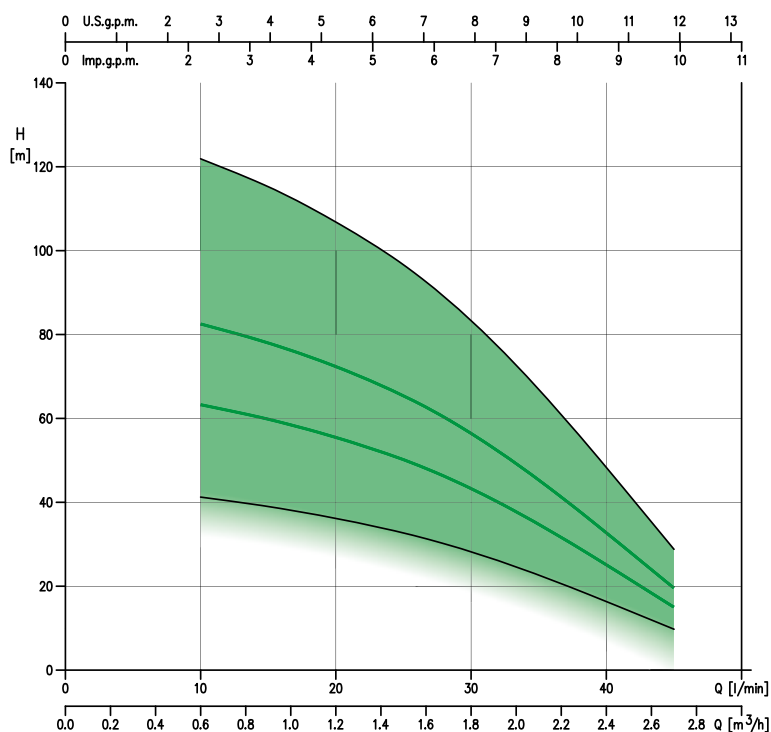

- Total head from 9.8 to 122 m
- Capacity from 0.6 to 2.7 m³/h
- Maximum immersion 60 m
- Maximum liquid temperature 30°C
- Maximum sand content 50 ppm

