

Automatic Variable Speed Booster Pump

Type JET-E

INVERTER Booster Pump System with LCD Display PID Controller

APPLICATIONS

- Domestic water supply for villas, houses, schools, hotels, pent-houses, rest houses and buildings.
- Industrial water boosting.

FEATURES / BENEFITS

- Constant pressure
 - PID Controller with inverter able to adjust water pressure perfectly by variable speed control.
- Energy saving
 - Using of the inverter able to save energy.
- No water hammering
 - Preventing water hammer as speed is adjusted automatically to meet variable demand.
- Fully tested & assembled unit
 - Ensure trouble-free operation.
- Stainless steel pump set used
 - Hygienic and clean water assured.
- EBARA TOTAL warranty on all components used
 - More value for money.
- Nationwide dealers representation
 - After-sales service assurance.

SPECIFICATIONS

Supply Voltage: 1 x 230 Vac ± 10% (50Hz)

Max liquid temperature: 90°C


Installation : Indoor / Outdoor






VFD-4500 Series Controller

PERFORMANCE CHART

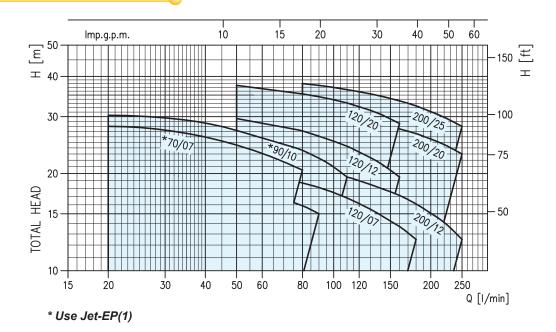

DIMENSION

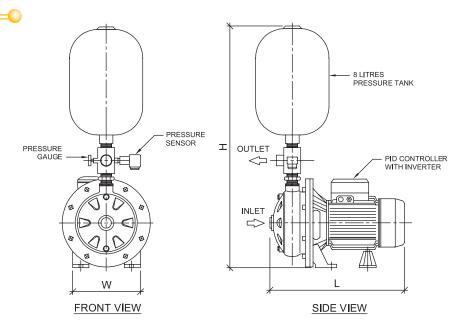

Model	Power (kw)	Dimension (mm)			Mainlet (lan)
		L	W	Н	Weight (kg)
120 / 07	0.55	318	160	605	16
120 / 12	0.9	318	160	605	18
120 / 20	1.5	345	180	625	21
200 / 12	0.9	318	160	605	17
200 / 20	1.5	345	180	605	19
200 / 25	1.8	345	180	625	22

^{*} Dimensional details are provided for reference only.

EBARA

EBARA Pumps Malaysia Sdn Bhd

6, Jalan TP3, UEP Subang Jaya Industrial Park, 47620 Subang Jaya, Selangor, Malaysia.
Tel: 03-8023 6622 Fax: 03-8023 9355

Email: sales@ebara.com.my Website: www.ebara.com.my



Authorised dealer:

^{*} All specifications are subject to change without prior notice.